



AXON EASY 400



EV



E-VAN



E-TRUCK

DC charging station that provides ultra-fast and friendly high-power charging. It is available in multiple power and connector configurations. The charger's new ease-of-use features respond to drivers' growing need for convenient, fast charging and intuitive operation. The device is adaptable to different weather conditions and is easy to install and use. The charger's modern design complements the urban architecture of today's city centers. This versatile and innovative device is suitable for integration with all charging service providers.



Highways



Parkings



Charging stations



City centers



Service areas



Commercial areas

Power	240, 320, 400 kW
Device type	All-In-One Charging Station
Power Split	50/50 Dynamic Load Balancing System (DLBS)
Power upgrade	240 > 400 320 > 400
Connectors	240, 320, 400 kW CCS / CCS, CCS HPC / CCS HPC
Voltage range	150 – 1000 V
Max. charging current	CCS 400 A (up to 500 A) CCS HPC 500 A
Selection of options	Connectors & cables lenght
	Meters
	AD Display
	Branding
	Power split
Metering standard	Payment terminals
	Eichrecht, MID compliant
Plug & Charge	ready

POWER THAT
MOVES YOU


ekoenergetyka.com

Find out more



PHOTOMATE
OFFICIAL DISTRIBUTOR

photomate.eu

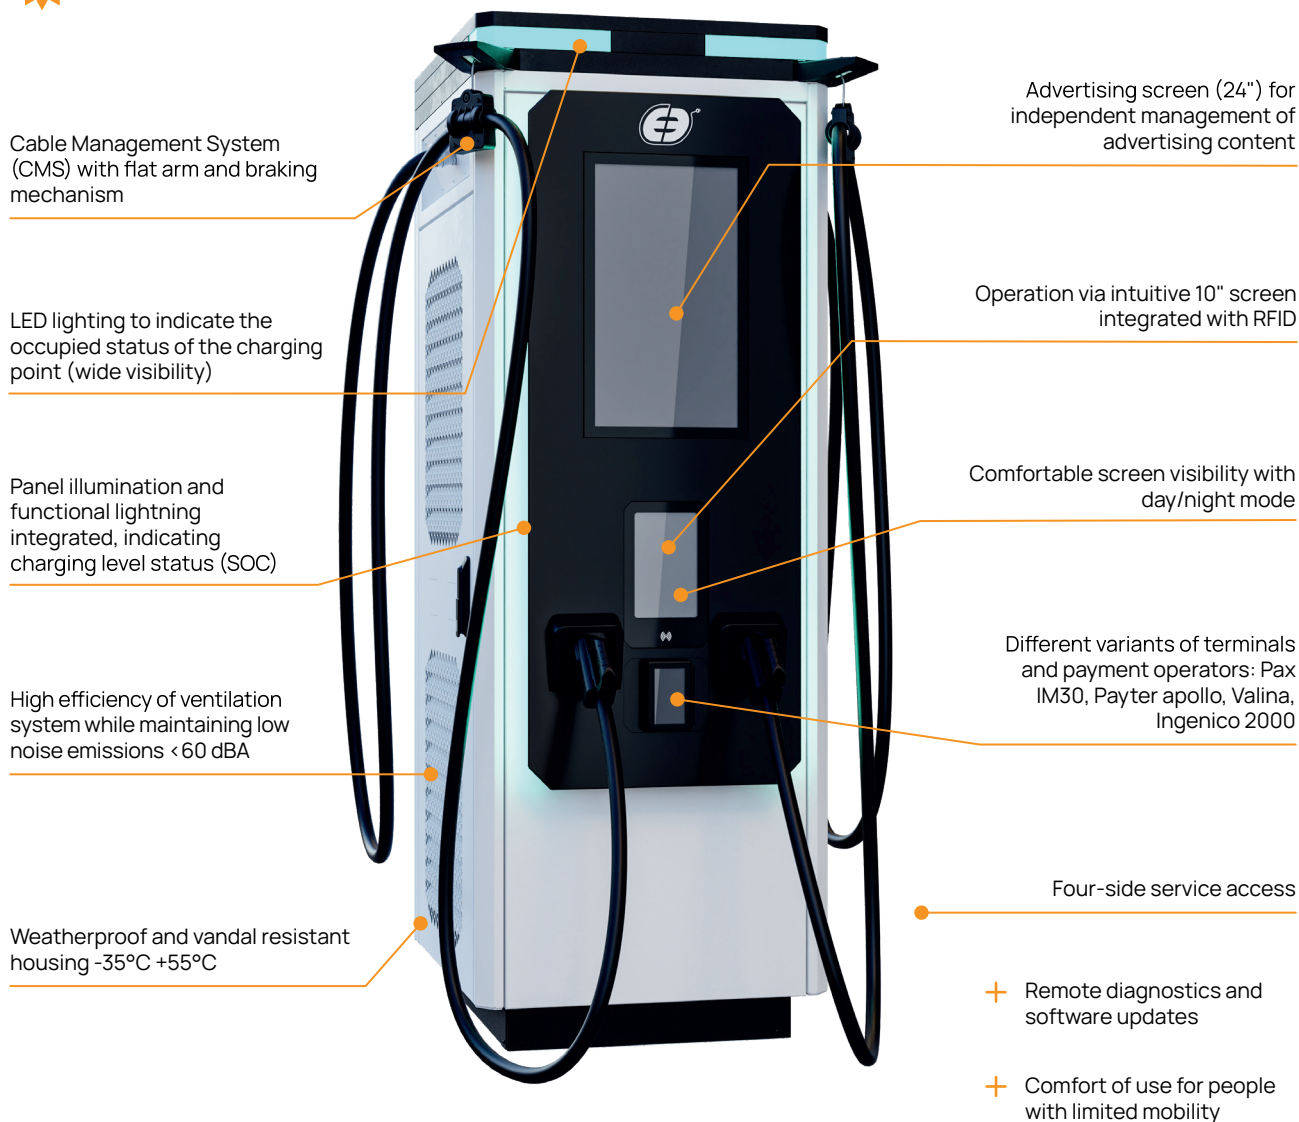

DYNAMIC LOAD BALANCING SYSTEM

Axon Easy 400 kW	
0 kW / 400 kW	280 kW / 120 kW
40 kW / 360 kW	360 kW / 40 kW
120 kW / 280 kW	400 kW / 0 kW
200 kW / 200 kW	

SELECT OPTIONS TO DESIGN YOUR PERFECT AXON EASY



Branding (Mini, Midi, Maxi, Full Wrap)



Connector extension (DC uncooled up to 7 or 9.5m)



Payment terminals and operators (PaxIM30, Payter apollo, Valina, Ingenico 2000)



Meters (Eichrecht, MID)



AD Display (individual or public advertising use)



Power upgrade (240 > 400kW, 320 > 400 kW)



Power split (50 / 50 or DLBS)